

Features

- Mobile heatable carpet underlay
- For use under the carpet
- Plug & Play - ready for use
- Fast and even heating
- Easy powering on/off due to integrated foot switch
- Suitable for laminate, parquet and wooden floors
- Easy to use and care

Description

Application

The ready-to-use “Undercarpet Heater” with Schuko plug is used to heat the carpet above. As a mobile heat source for cosy warm feet, it is particularly suitable for e.g. rented flats or children's rooms. Not suitable for damp rooms.

The “Undercarpet Heater” is bordered and sewn all around. It is intended exclusively for use under carpets indoors and is particularly suitable for the following floors: parquet, wooden floors, laminate and other imitation wooden floors (e.g. click vinyl).

Construction

The “Undercarpet Heater” consists of a pile top and bottom layer, an integrated cable heating element, and a power cord with foot switch and plug. The heating cable is arranged meandering on a flexible, grid-shaped mesh and fixed with an adhesive tape, providing constant cable-to-cable distance. This ensures fast and uniform heating.

Ordering information

Undercarpet heater PRO 2,0x1,4

Product type _____
Dimension, m _____

Products


Undercarpet Heater PRO

| Type | Dimensions, mm | Rated power, W |
|--------------------------------|----------------|----------------|
| Undercarpet heater PRO 1,4x1,0 | 1400 x 1000 | 180 |
| Undercarpet heater PRO 2,0x1,4 | 2000 x 1400 | 365 |
| Undercarpet heater PRO 2,8x1,8 | 2800 x 1800 | 655 |

Design



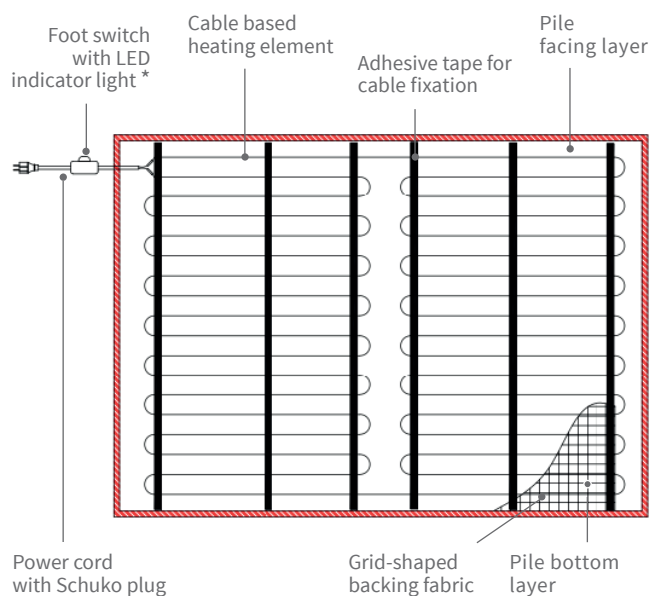

Construction



* The LED integrated in the foot switch indicates the operating status of the “Undercarpet Heater”. If the LED lights up blue, the “Undercarpet Heater” is switched on. If the LED does not lit, the carpet is switched off.

Technical data

| | | | |
|----------------------|---|-------------|-------------|
| Dimensions, mm (LxW) | 1400 x 1000 | 2000 x 1400 | 2800 x 1800 |
| Rated power output | 180 W | 365 W | 655 W |
| Rated voltage | 230 V AC, 50 Hz | | |
| Surface temperature | ~ 30 °C max. ** | | |
| Power cord length | 2.8 m | | |
| Appliance class | II | | |
| IP protection class | IPX7 | | |
| Pile color | dark grey | | |
| Plug type | CEE 7/7 (Typ E/F) | | |
| Certifications |   | | |

** The achievable surface temperature on the carpet laid on top of the “Undercarpet Heater” mainly depends on the nature of the carpet above, from the substrate (floor covering) and the ambient temperature.